


**Overview**


Clamp-on Sensors are made for direct pipe mounting and temperature measurement of water pipe applications. These sensors are for mounting before any insulation is on the pipe.

Strap Sensors are spring-loaded units that are for mounting to pipes with up to 2" of insulation using a unique spring sensor extension.


Enclosure mounting styles come in plastic or metal for both NEMA 1 and NEMA 4 applications and are all plenum rated.

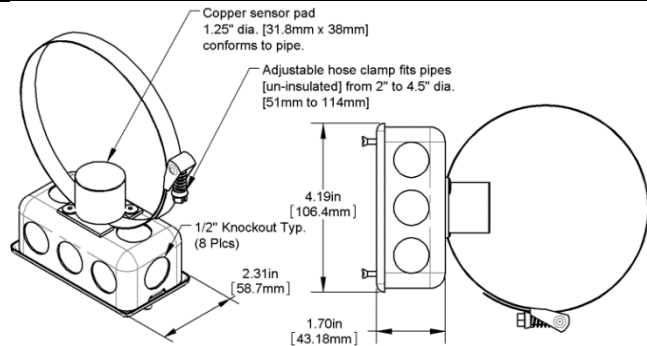

**Figure 1: Clamp-On with NEMA 1 J-Box (JB)**  
Part #s NSB-10K-2-S | NSB-50K-S-A

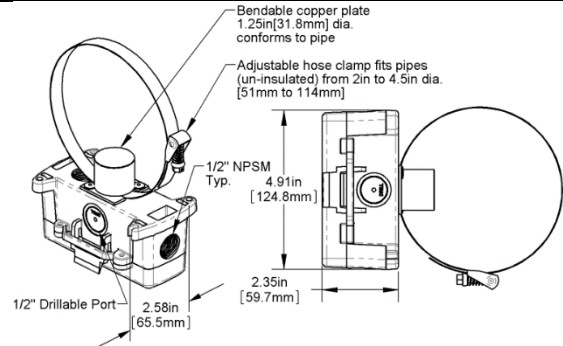


**Figure 2: Clamp-On with with NEMA 4 BB2 Box**  
Part # NSB-10K-2-S-BB2

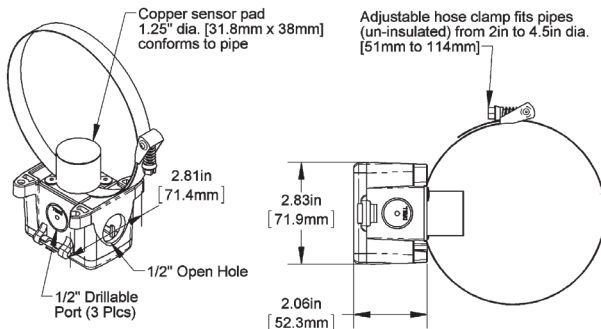


**Figure 3: Clamp-On with NEMA 1 BB4 Box-**  
Part # NSB-10K-2-S-BB4


A Pierceable Knockout Plug (Part # NSB-PKP-100) is available for the open port in the BB4.

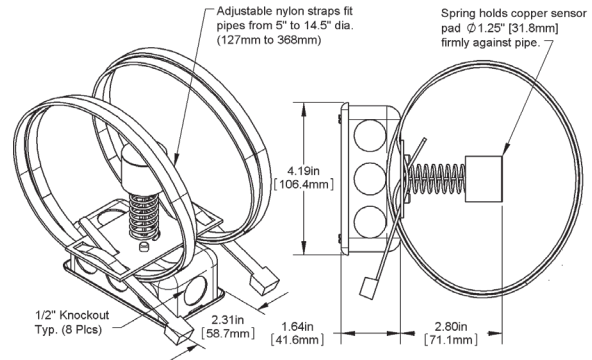

**Figure 4: Spring-Loaded Strap with NEMA 1 J-Box (JB)**  
Part # NSB-10K-2-STP

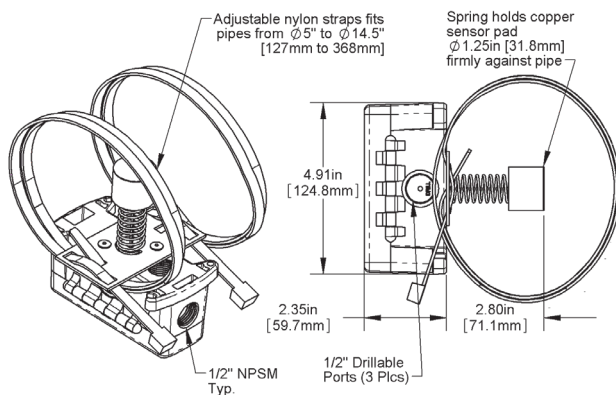



**Figure 5: Spring-Loaded Strap with NEMA 4 BB2 Box**  
Part # NSB-10K-2-STP-BB2

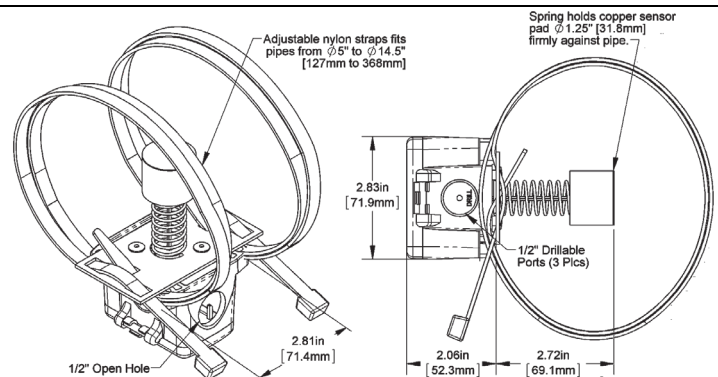

**Figure 6: Spring-Loaded Strap with NEMA 1 BB4 Box**  
Part # NSB-10K-2-STP-BB4

A Pierceable Knockout Plug (Part # NSB-PKP-100) is available for the open port in the BB4.

Specification subject to change without notice

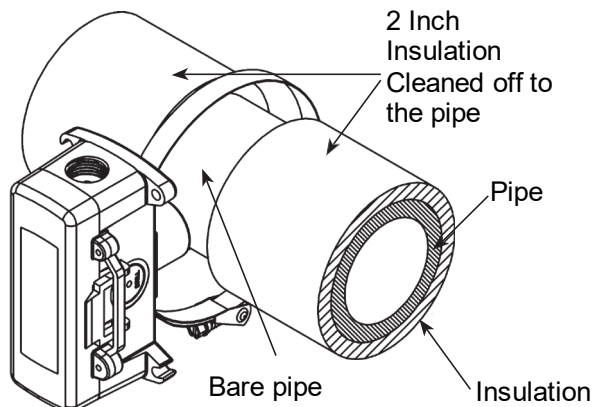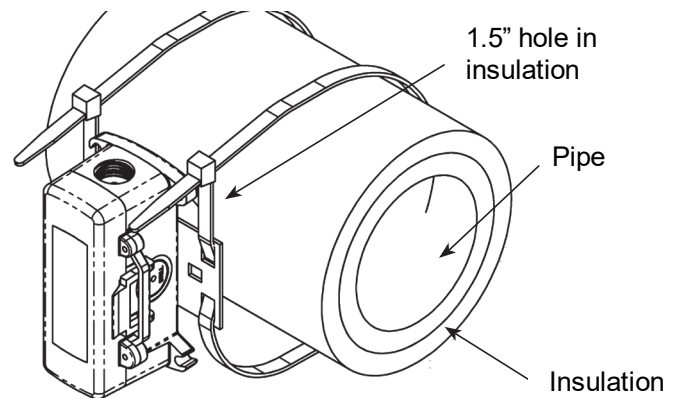**Mounting****Figure 7:** Typical Clamp-On (-S) Installation**Figure 8:** Typical Spring-loaded (-STP) Installation

**Application:** This sensor reads the fluid temperature in a pipe by reading the temperature of the pipe. Properly installed strap sensors with insulation around the local strap-on sight will offer a very accurate temperature of the water inside the pipe to within .5 °F or better of the inside pipe water temperature.

**Clamp-On Unit Installation:**

Figure 7 shows a typical installation for pipes from 2" to 4.5". Stripping away insulation is OK. Larger pipes can be accommodated by adding another, customer supplied, stainless steel hose clamp.

1. If there is insulation, clean away a section of the pipe insulation a minimum of 2" all around the pipe. The copper sensor pad and SS strap must be in direct contact with the metal or plastic pipe. **NOTE** Nothing should be between the copper plate sensor and the bare pipe.
2. Tighten the clamp so that the sensor does not slide around the pipe and the foam is compressed no more than 50% allowing the copper sensor plate to form (bend) to the pipe curvature for maximum temperature conduction. Automated Logic® recommends pre-forming the copper plate by bending it around the pipe with your fingers.
3. After the clamp-on sensor is securely mounted, add insulation a minimum of 1" thick and a minimum of 4 pipe diameters on each side of the copper sensor pad. (Example: A 2" pipe should have 8" of insulation on each side of the sensor). Only cover the sensor box to the top of the metal cover plate or to the BB door hinge so termination and servicing can be completed.
4. Terminate per the instructions in "Wiring and Termination".

**Strap Spring-loaded Unit Installation:**

Figure 8 shows a typical installation for insulated pipes from 5" to 14". Insulation thickness accommodated is 0.5" to 2.5". Larger pipes can be accommodated by adding another, customer supplied, tie rap strap.

1. Make a 1.5 inch diameter hole in the insulation where the sensor is to be placed and clean the pipe from debris. Extend the spring so that the copper sensor pad is in direct contact with the metal or plastic pipe. **NOTE** No debris should be between the copper plate sensor and the bare pipe. The spring can retract to a minimum insulation thickness of ~.5" compressed to ~2.5" extended.
2. Position the box and sensor over the hole.

*Specification subject to change without notice*

1150 Roberts Boulevard, Kennesaw, Georgia 30144  
770-429-3000 Fax 770-429-3001 | www.automatedlogic.com

3. Tighten the strap so that the sensor spring is compressed no more than 50% allowing the copper sensor plate to form (bend) to the pipe curvature for maximum temperature conduction. Automated Logic recommends pre-forming the copper plate by bending it around the pipe with your fingers. Extend the spring further by turning it clockwise if the copper sensor plate contact is questionable. The copper sensor plate must be in direct contact with the pipe.
4. After the strap sensor is securely mounted, add insulation back in (backfill) around the spring extension, using the removed insulation, so that no heat or cold from the pipe can escape.
5. If more insulation is desired, cover the sensor box only to the top of the metal cover plate or to the BB door hinge so termination and servicing can be completed.
6. Terminate per the instructions in “Wiring and Termination”.

## Wiring and Termination

Automated Logic® recommends using twisted pair of at least 22 AWG for runs under 100 feet, and sealant filled connectors for all wire connections. Runs from 100 to 500 feet should use shielded 22 AWG. All wiring must comply with the National Electric Code (NEC) and local codes. Do NOT run this device’s wiring in the same conduit as high or low voltage AC power wiring. Tests show that inaccurate signal levels are possible when AC power wiring is present in the same conduit as the sensor wires.

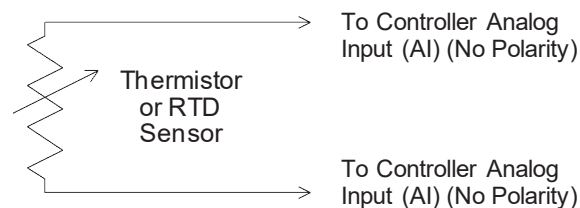


Figure 9: 2 Wire Lead Wire Termination for Thermistor or RTD

## Diagnostics

### Possible Problem:

Controller reports higher or lower than actual temperature

### Possible Solutions:

- Confirm the input is set up correctly in the controller to which the sensor is attached
- Check wiring for proper termination and continuity (shorted or open).
- Disconnect wires and measure sensor resistance and verify the “Sensor” output is correct.
- Add or subtract an offset for the sensor in the controller

**Specifications**

<b>Sensor</b>	Passive, NTC, 2 wire	<b>Enclosure Ratings</b>	
<b>Thermistor</b>	Thermal resistor	J-Box (-JB)	NEMA 1
Temp. Output (Std)	Resistance Accuracy	BB2 Box	NEMA 4, IP66, UV Rated
Stability	±0.36°F, (±0.2°C)	BB4 Box	IP10 (with spring installed) (IP44 without spring and with Knockout Plug installed in the open port)
Heat dissipation	< 0.036°F/Year, (<0.02°C/Year)		
Temp. Drift	2.7 mW/°C		
Probe range	<0.02°C per year		
	-40° to 221°F (-40° to 105°C)		
<b>Lead wire</b>	22awg stranded	<b>Enclosure Material</b>	
<b>Wire Insulation</b>	Etched Teflon, Plenum rated	J-Box (-JB)	Galvanized steel, UL94H-B
<b>Probe</b>	Copper sensor plate, 24 AWG, 1.25" diameter	BB2 Box	Polycarbonate, UL94V-0, UV rated
		BB4 Box	Polycarbonate and Nylon, UL94V-0
<b>Mounting</b>		<b>Ambient (Enclosure)</b>	0 to 100% RH, Non-condensing
Clamp-On (-S)	½" Stainless steel worm gear hose clamp	J-Box (-JB)	-40°F to 212°F, (-40° to 100°C)
Strap (-STP)	48" Nylon tie strap, 1/2" wide	BB2 Box	-40°F to 185°F, (-40 to 85°C)
<b>Enclosure Types</b>		BB4 Box	-40°F to 185°F, (-40 to 85°C)
J-Box (-JB)	With eight ½" knock-outs		
BB2 Box	With three ½" NPSM and three ½" drill-outs	<b>Agency</b>	RoHS, CE
BB4 Box:	With three ½" drill-outs and one ½" open port		

Specification subject to change without notice